Articulated feet, sanitizable

(base in stainless steel)

Part. **107 ø 75**

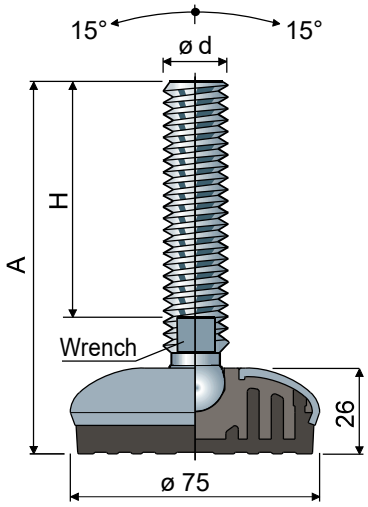

Spindle measures in mm					
ød	A	H	Wrench	Spindle and base in stainless steel AISI 304 Code	Max static load (N)
M16x2	103	60	13	**107 / 83524**	19000
	133	90	13	**107 / 83525**	
	148	105	13	**107 / 83526**	
	168	125	13	**107 / 83527**	
	198	155	13	**107 / 83528**	
	208	165	13	**107 / 83529**	
	248	205	13	**107 / 83530**	
M20x2,5	132	86	17	**107 / 83531**	21000
	162	116	17	**107 / 83532**	
	187	141	17	**107 / 83533**	
	207	161	17	**107 / 88856**	
	244	198	17	**107 / 83534**	
M24x3	142	96	19	**107 / 83535**	23000
	168	122	19	**107 / 83536**	
	198	152	19	**107 / 83537**	
	228	182	19	**107 / 83538**	
	346	300	19	**107 / 83539**	
M30x3,5	190	144	24	**107 / 86221**	25000

Spindle measures in inches					
ød	A	H	Wrench	Spindle and base in stainless steel AISI 304 Code	Max static load (N)
5/8"-11 UNC	8,70"	7"	1/2"	**107 / 83592**	19000
3/4"-10 UNC	8,78"	7"	5/8"	**107 / 83593**	21000

Base material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.
Features: Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.
Box quantity: 8 pieces.

Washers UNI 6592-69 - **Box quantity:** 24 pieces.



ø M	M16	M20	M24	M30
S mm	3	3	4	4
ø A mm	30	37	44	56
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - **Box quantity:** 24 pieces.



ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Stainless steel codes	7277	7278	7280	7282

On request

- **Spindles with:** Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- **Anti-slip pads:** White colour.
- **Assembling of:** Nuts • washers.
- **Box quantity:** According to your request.

Thread sizes in inches are expressed as the number of threads (UNC coarse thread) per Imperial inch