
# Articulated feet, sanitizable with side fixing system

(base in stainless steel)



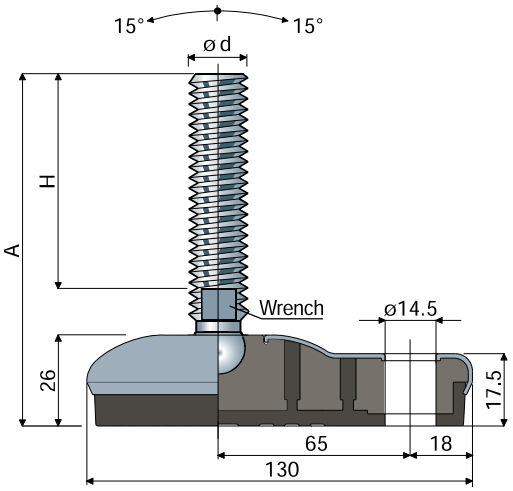



**95x130** Part. **111**

| Spindle measures in mm | | | | | |
|---|---|---|---|---|---|
| ød | A | H | Wrench | Spindle and base in stainless steel AISI 304 Code | Max static load (N) |
| M16x2 | 103 | 60 | 13 | **111 / 83762** | 22000 |
| | 133 | 90 | 13 | **111 / 83763** | |
| | 148 | 105 | 13 | **111 / 83764** | |
| | 168 | 125 | 13 | **111 / 83765** | |
| | 198 | 155 | 13 | **111 / 83766** | |
| | 208 | 165 | 13 | **111 / 83767** | |
| | 248 | 205 | 13 | **111 / 83768** | |
| M20x2,5 | 134 | 86 | 17 | **111 / 83769** | 24000 |
| | 164 | 116 | 17 | **111 / 83770** | |
| | 189 | 141 | 17 | **111 / 83771** | |
| | 209 | 161 | 17 | **111 / 88858** | |
| | 246 | 198 | 17 | **111 / 83772** | |
| M24x3 | 143 | 96 | 19 | **111 / 83773** | 26000 |
| | 169 | 122 | 19 | **111 / 83774** | |
| | 199 | 152 | 19 | **111 / 83775** | |
| | 229 | 182 | 19 | **111 / 83776** | |
| | 347 | 300 | 19 | **111 / 83777** | |
| M30x3,5 | 188 | 144 | 24 | **111 / 86219** | 28000 |

| Spindle measures in inches | | | | | |
|---|---|---|---|---|---|
| ød | A | H | Wrench | Spindle and base in stainless steel AISI 304 Code | Max static load (N) |
| 5/8"-11 UNC | 8,76" | 7" | 1/2" | **111 / 83778** | 22000 |
| 3/4"-10 UNC | 8,84" | 7" | 5/8" | **111 / 83779** | 24000 |


**Base material:** Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.
**Features:** Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.
**Box quantity:** 8 pieces.

**Washers** UNI 6592-69 - **Box quantity:** 24 pieces.




| øM | M16 | M20 | M24 | M30 |
|---|---|---|---|---|
| Smm | 3 | 3 | 4 | 4 |
| øAmm | 30 | 37 | 44 | 56 |
| Stainless steel codes | 7291 | 7292 | 7294 | 7296 |

**Nuts** UNI 5588-65 - **Box quantity:** 24 pieces.




| ød | M16 | M20 | M24 | M30 |
|---|---|---|---|---|
| Smm | 13 | 16 | 19 | 24 |
| Ch. mm | 24 | 30 | 36 | 46 |
| Stainless steel codes | 7277 | 7278 | 7280 | 7282 |

On request
- **Spindles with:** Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- **Anti-slip pads:** White colour.
- **Assembling of:** Nuts • washers.
- **Box quantity:** According to your request.

Thread sizes in inches are expressed as the number of threads (UNC coarse thread) per Imperial inch