
Adjustable feet

(base in steel)

Part. 96 ø 113




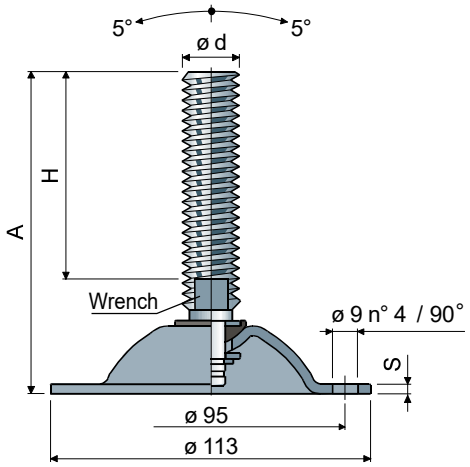

Spindle measures in mm				Spindle and base material		
ød	A	H	Wrench	Zinc plated steel Code	Stainless steel AISI 304 Code	Max static load (N)
M16x2	100	58	13	96 / 7562	96 / 7563	15000 (zinc plated) S = 3,5
	131	89	13	96 / 89304	96 / 89311	
	161	119	13	96 / 7916	96 / 7917	
	187	145	13	96 / 7564	96 / 7565	
	243	201	13	96 / 7566	96 / 7567	
M18x2,5	199	157	15	96 / 82138	96 / 82139	
M20x2,5	134	89	17	96 / 87322	96 / 87323	
	152	107	17	96 / 7568	96 / 7569	
	181	136	17	96 / 7570	96 / 7571	
	202	157	17	96 / 7572	96 / 7573	
	235	190	17	96 / 83232	96 / 83233	10000 (AISI 304) S = 3
	283	238	17	96 / 83234	96 / 83235	
M24x3	138	90	19	96 / 7574	96 / 7575	
	175	127	19	96 / 7576	96 / 7577	
	210	162	19	96 / 7578	96 / 7579	
	250	202	19	96 / 83236	96 / 83237	
M30x3,5	173	125	24	96 / 7580	96 / 7581	
	233	185	24	96 / 7582	96 / 7583	


Materials: Spindle and base in zinc plated steel or stainless steel AISI 304; washer in reinforced polyamide.
Box quantity: 8 pieces.

Washers UNI 6592-69 - **Box quantity:** 24 pieces.



ø M	M16	M20	M24	M30
S mm	3	3	4	4
ø A mm	30	37	44	56
Zinc plated steel codes	7289	7290	7293	7295
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - **Box quantity:** 24 pieces.



ø d	M16	M20	M24	M30
S mm	13	16	19	24
Ch. mm	24	30	36	46
Zinc plated steel codes	7275	7276	7279	7281
Stainless steel codes	7277	7278	7280	7282

On request

- **Spindles with:** Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- **Assembling of:** Nuts • washers.
- **Box quantity:** According to your request.