

## SUITABLE FOR CHAINS:


- 600 / 610 / LBP 610
- 500 / HF 500 / HF 510 / HFS 510
- 300 / 200 / HF 200
- 650M
- 611 WITHOUT TRACKING GUIDE (ALL WIDTHS)
- 611 WITH TRACKING GUIDE (51 mm, 76 mm WIDTHS ONLY)
- RR 611 (ALL WIDTHS)

## MATERIALS


SPROCKETS: **PGF** REINFORCED POLYAMIDE

SCREWS: **SS** STAINLESS STEEL


NUTS: **ZN** ZINC PLATED STEEL

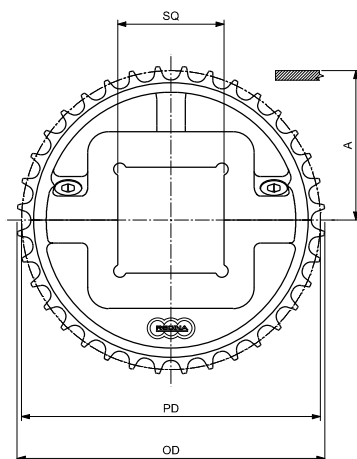


SQUARE BORE - DRIVE/IDLER

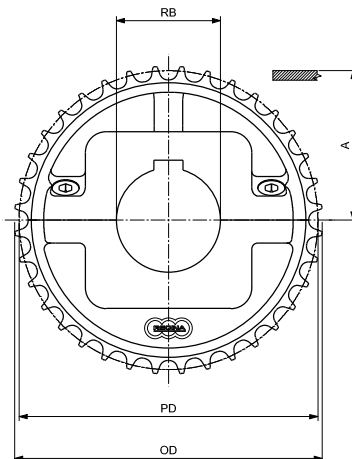

ROUND BORE - DRIVE

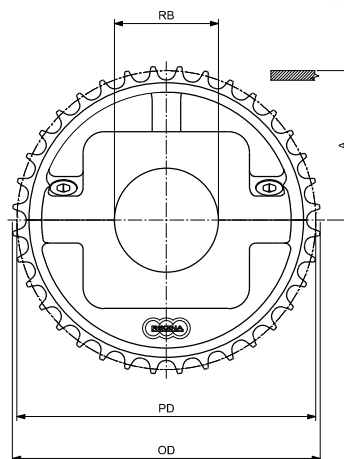

ROUND BORE - IDLER



NOTE: FOR 28T SPROCKET, THE HUB WIDTH IS 26 mm (1.024")

## MOULDED SPLIT DRIVE AND IDLER SPROCKETS

| N. TEETH | PITCH DIAMETER PD |       | OUTSIDE DIAMETER OD |       | WEAR STRIP POSITIONING A |       | BORE SIZE* |               | PART NUMBER   | WEIGHT    |
|----------|-------------------|-------|---------------------|-------|--------------------------|-------|------------|---------------|---------------|-----------|
|          | mm                | inch  | mm                  | inch  | mm                       | inch  | mm         | inch**        |               |           |
| 28       | 113,43            | 4.466 | 114,69              | 4.515 | 52,40                    | 2.063 | 25         |               | MPBST6002825  | 0,16 0.35 |
|          |                   |       |                     |       |                          |       | 30         |               | MPBST6002830  | 0,16 0.34 |
|          |                   |       |                     |       |                          |       | 35         |               | MPBST6002835  | 0,15 0.33 |
|          |                   |       |                     |       |                          |       | 40         | MPBSQ6002840  | MPBST6002840  | 0,14 0.32 |
|          |                   |       |                     |       |                          |       | 1          |               | MPBSF60028254 | 0,16 0.35 |
|          |                   |       |                     |       |                          |       | 1 1/4      |               | MPBST60028317 | 0,15 0.34 |
| 36       | 145,69            | 5.736 | 148,00              | 5.827 | 68,50                    | 2.697 | 1 1/2      | MPBSQ60028381 | MPBST60028381 | 0,15 0.32 |
|          |                   |       |                     |       |                          |       | 30         |               | MPBST6003630  | 0,38 0.83 |
|          |                   |       |                     |       |                          |       | 35         |               | MPBST6003635  | 0,37 0.82 |
|          |                   |       |                     |       |                          |       | 40         | MPBSQ6003640  | MPBST6003640  | 0,36 0.80 |
|          |                   |       |                     |       |                          |       | 45         |               | MPBST6003645  | 0,35 0.78 |
|          |                   |       |                     |       |                          |       | 50         | MPBSQ6003650  | MPBST6003650  | 0,34 0.75 |
|          |                   |       |                     |       |                          |       | 1          |               | MPBSF60036254 | 0,38 0.85 |
|          |                   |       |                     |       |                          |       | 1 3/16     |               | MPBST60036301 | 0,38 0.83 |
|          |                   |       |                     |       |                          |       | 1 1/4      |               | MPBSF60036317 | 0,38 0.83 |
|          |                   |       |                     |       |                          |       | 1 7/16     |               | MPBST60036365 | 0,37 0.81 |
| 38       | 153,8             | 6.055 | 156,00              | 6.142 | 72,55                    | 2.856 | 1 1/2      | MPBSQ60036381 | MPBST60036381 | 0,37 0.81 |
|          |                   |       |                     |       |                          |       | 30         |               | MPBST6003830  | 0,39 0.86 |
|          |                   |       |                     |       |                          |       | 35         |               | MPBST6003835  | 0,38 0.84 |
|          |                   |       |                     |       |                          |       | 40         | MPBSQ6003840  | MPBST6003840  | 0,37 0.83 |
|          |                   |       |                     |       |                          |       | 45         |               | MPBST6003845  | 0,36 0.80 |
|          |                   |       |                     |       |                          |       | 50         | MPBSQ6003850  | MPBST6003850  | 0,35 0.78 |
|          |                   |       |                     |       |                          |       | 1          |               | MPBSF60038254 | 0,40 0.87 |
|          |                   |       |                     |       |                          |       | 1 3/16     |               | MPBST60038301 | 0,39 0.86 |
|          |                   |       |                     |       |                          |       | 1 1/4      |               | MPBSF60038317 | 0,39 0.86 |
|          |                   |       |                     |       |                          |       | 1 7/16     |               | MPBST60038365 | 0,38 0.84 |
| 38       | 153,8             | 6.055 | 156,00              | 6.142 | 72,55                    | 2.856 | 1 1/2      | MPBSQ60038381 | MPBST60038381 | 0,38 0.84 |

\*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

\*\* Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.