


8,7 mm (0.343") THICKNESS SOLID TOP

The belt offers a completely closed top surface design for an excellent product support without tipping. The round bottom surface combined to the reduced pitch (1/2") provides the minimum chordal effect for an optimum head transfer of products. Particularly suitable for conveyors where a head transfer of products is required.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for **UP** and **DK2** materials
10000 N/m (685 lbs/ft) for **PP** material
- **Belt weight:** 9,55 kg/m² (1.96 lbs/ft²) for **UP** and **DK2** materials
6,46 kg/m² (1.32 lbs/ft²) for **PP** material



VERSION WITHOUT TRACKING GUIDE

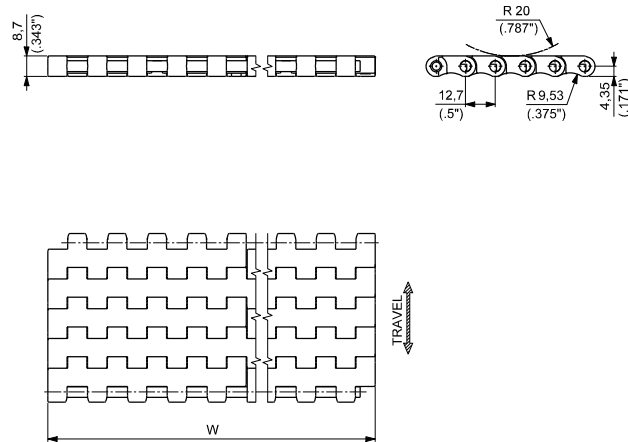

VERSION WITH TRACKING GUIDE

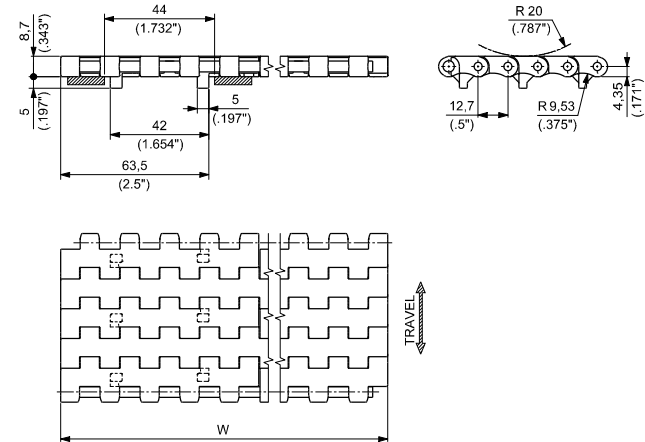

Materials
see page 12



Nosebar
see page 182



Sprockets
see pages 190÷194



Applications
see page 24

WIDTH W		MATERIALS								Pin
		Module								
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®		PP SPECIAL POLYPROPYLENE ⁽¹⁾				
		PART NUMBER		PART NUMBER		PART NUMBER				
		WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE			
mm	inch									
85	3.35	610AUP0085	610AGUP0085	610AD2K0085	610AGD2K0085	610APP0085	610AGPP0085	PBT		
170	6.69	610BUP0170	610BG1UP0170	610BD2K0170	610BG1D2K0170	610BPP0170	610BG1PP0170	POLYPROPYLENE (PBT on request)		
255	10.04	610BUP0255	610BG1UP0255	610BD2K0255	610BG1D2K0255	610BPP0255	610BG1PP0255			
340	13.39	610BUP0340	610BG1UP0340	610BD2K0340	610BG1D2K0340	610BPP0340	610BG1PP0340			
425	16.73	610BUP0425	610BG1UP0425	610BD2K0425	610BG1D2K0425	610BPP0425	610BG1PP0425			
510	20.08	610BUP0510	610BG1UP0510	610BD2K0510	610BG1D2K0510	610BPP0510	610BG1PP0510			
595	23.43	610BUP0595	610BG1UP0595	610BD2K0595	610BG1D2K0595	610BPP0595	610BG1PP0595			
680	26.77	610BUP0680	610BG1UP0680	610BD2K0680	610BG1D2K0680	610BPP0680	610BG1PP0680			
765	30.12	610BUP0765	610BG1UP0765	610BD2K0765	610BG1D2K0765	610BPP0765	610BG1PP0765			
850	33.46	610BUP0850	610BG1UP0850	610BD2K0850	610BG1D2K0850	610BPP0850	610BG1PP0850			
935	36.81	610BUP0935	610BG1UP0935	610BD2K0935	610BG1D2K0935	610BPP0935	610BG1PP0935			
1020	40.16	610BUP1020	610BG1UP1020	610BD2K1020	610BG1D2K1020	610BPP1020	610BG1PP1020			

⁽¹⁾ ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "600BUP1105".



Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.