


## SINGLE HINGE









PITCH 1 ½" (38,1 mm)

THICKNESS 4 mm (0.157")

HINGE 41,6 mm (1.638")

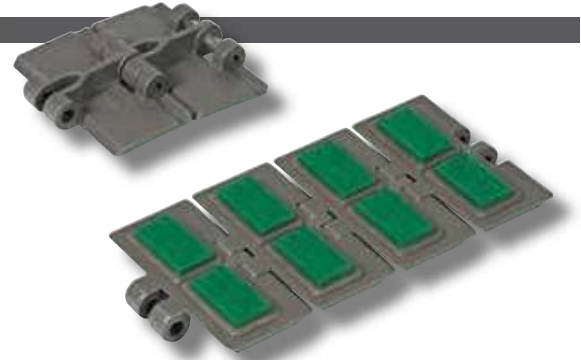

## RUBBER PAD POSITION

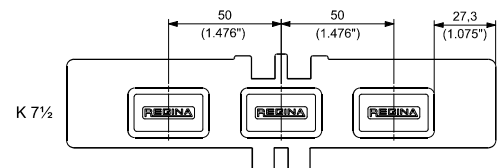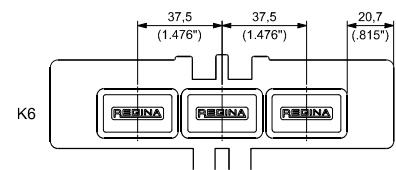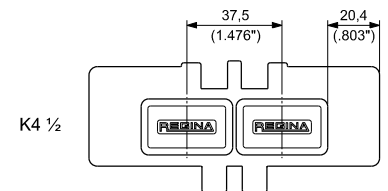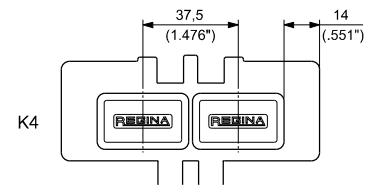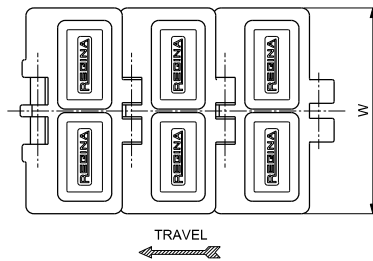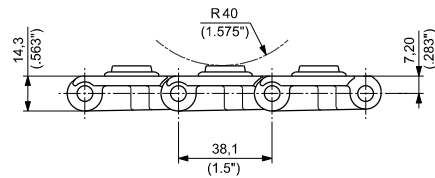

Materials  
see page 14



Sprockets  
see pages 141÷144



Assembly tool  
see pages 366÷367



Applications  
see page 22

| MATERIALS                                      |                               |                                          | ITEM DESCRIPTION | PART NUMBER  | WIDTH W |      | PLATE THICKNESS |      | WORKING LOAD (25°C/77°F) |     | WEIGHT |        |
|------------------------------------------------|-------------------------------|------------------------------------------|------------------|--------------|---------|------|-----------------|------|--------------------------|-----|--------|--------|
| Plate                                          | Pin                           | Rubber                                   |                  |              | mm      | inch | mm              | inch | N                        | lbs | kg/m   | lbs/ft |
| ULTRA PERFORMANCE<br>HOMOPOLYMER DELRIN®<br>UP | AUSTENITIC<br>STAINLESS STEEL | THERMOPLASTIC<br>TPE<br>Hardness: 70 ShA | HFX 820 UP K 3 ¼ | HFX820KD/000 | 82,6    | 3.25 | 4,0             | 0.16 | 1600                     | 360 | 1,00   | 0.67   |
|                                                |                               |                                          | HFX 820 UP K 4   | HFX820KF/000 | 101,6   | 4.00 | 4,0             | 0.16 | 1600                     | 360 | 1,09   | 0.73   |
|                                                |                               |                                          | HFX 820 UP K 4 ½ | HFX820KG/000 | 114,3   | 4.50 | 4,0             | 0.16 | 1600                     | 360 | 1,17   | 0.79   |
|                                                |                               |                                          | HFX 820 UP K 6   | HFX820KH/000 | 152,4   | 6.00 | 4,0             | 0.16 | 1600                     | 360 | 1,45   | 0.97   |
|                                                |                               |                                          | HFX 820 UP K 7 ½ | HFX820KL/000 | 190,5   | 7.50 | 4,0             | 0.16 | 1600                     | 360 | 1,60   | 1.07   |



Standard packaging:  
Rolls of 3,048 m (10 feet)