



TAB PLASTIC FLIGHTS
3/4" PITCH ROLLER CHAIN
LONG FINGERS RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

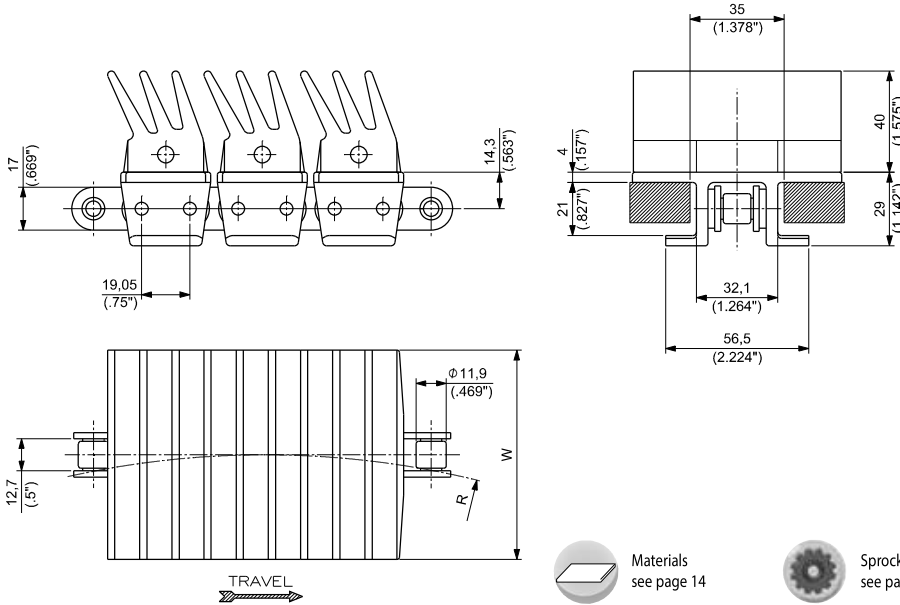

Materials
see page 14

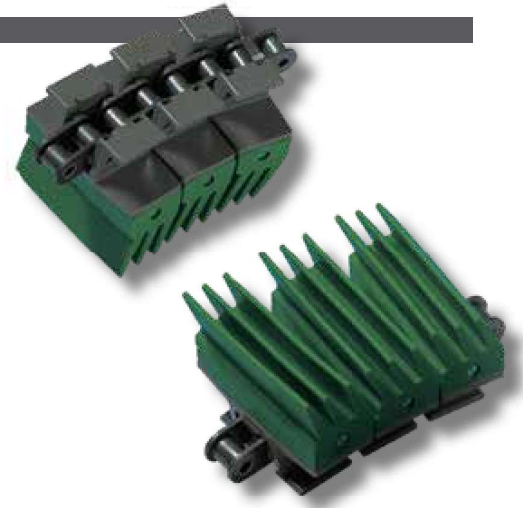

Sprockets
see page 154



Corner tracks
see page 346



Applications
see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT		
Flight	Base chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft	
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	CARBON STEEL 		EW 1873T UP K 3 ¼	EW1873KD/000	18/0873	82,6	3.25	355,6	14.00	4500	1012	4,16	2.80	
			EW 1873T UP K 4 ½	EW1873UPKG/000		114,3	4.50	355,6	14.00	4500	1012	4,94	3.32	
	STAINLESS STEEL 	THERMOPLASTIC TPE Hardness: 50 ShA	EW 1873T UP SS K 3 ¼	EW1873SKD/000	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,11	2.76	
			EW 1873T UP SS K 4 ½	EW1873UPSKG/000		114,3	4.50	355,6	14.00	3500	787	4,89	3.29	
	MAINTENANCE FREE CARBON STEEL 		EW 1873T UP BS K 3 ¼	EW1873UPBKD/000	18/873BS	82,6	3.25	355,6	14.00	3500	787	4,17	2.80	
			EW 1873T UP BS K 4 ½	EW1873UPBKG/000		114,3	4.50	355,6	14.00	3500	787	4,95	3.33	
	STAINLESS STEEL 	HEAT STABILIZED THERMOPLASTIC HS Hardness: 45 ShA	EW 1873T UP HS SS K 3 ¼	EW1873HSSKD/003	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,37	2.94	
	SPECIAL DELRIN® REINFORCED WITH KEVLAR® DK2™	CARBON STEEL 		EW 1873T D2K K 3 ¼	EW1873D2KKD/000	18/0873	82,6	3.25	355,6	14.00	4500	1012	4,16	2.80
				EW 1873T D2K K 4 ½	EW1873D2KKG/000		114,3	4.50	355,6	14.00	4500	1012	4,94	3.32
STAINLESS STEEL 		THERMOPLASTIC TPE Hardness: 50 ShA	EW 1873T D2K SS K 3 ¼	EW1873D2KSKD/000	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,11	2.76	
			EW 1873T D2K SS K 4 ½	EW1873D2KSKG/000		114,3	4.50	355,6	14.00	3500	787	4,89	3.29	
MAINTENANCE FREE CARBON STEEL 			EW 1873T D2K BS K 3 ¼	EW1873D2KBKD/000	18/873BS	82,6	3.25	355,6	14.00	3500	787	4,17	2.80	
			EW 1873T D2K BS K 4 ½	EW1873D2KBKG/000		114,3	4.50	355,6	14.00	3500	787	4,95	3.33	
STAINLESS STEEL 		HEAT STABILIZED THERMOPLASTIC HS Hardness: 45 ShA	EW 1873T D2K HS SS K 3 ¼	EW1873HSSKD/002	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,37	2.94	



Standard packaging:
Rolls of 3,048 m (10 feet)