
Articulated feet, sanitizable

(base in stainless steel)

ø 95 Part. **101**



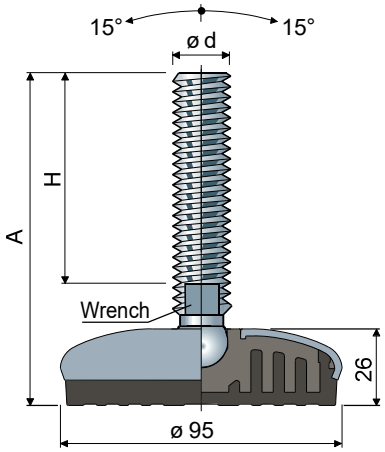


Spindle measures in mm					
ød	A	H	Wrench	Spindle and base in stainless steel AISI 304 Code	Max static load (N)
M16x2	103	60	13	**101 / 83073**	22000
	133	90	13	**101 / 83074**	
	148	105	13	**101 / 83075**	
	168	125	13	**101 / 83076**	
	198	155	13	**101 / 83077**	
	208	165	13	**101 / 83078**	
	248	205	13	**101 / 83263**	
M20x2,5	132	86	17	**101 / 83079**	24000
	162	116	17	**101 / 83209**	
	187	141	17	**101 / 83081**	
	207	161	17	**101 / 88857**	
	244	198	17	**101 / 83082**	
M24x3	142	96	19	**101 / 83083**	26000
	168	122	19	**101 / 83084**	
	198	152	19	**101 / 83085**	
	228	182	19	**101 / 83086**	
	346	300	19	**101 / 83087**	
M30x3,5	190	144	24	**101 / 86220**	28000

Spindle measures in inches					
ød	A	H	Wrench	Spindle and base in stainless steel AISI 304 Code	Max static load (N)
5/8"-11 UNC	8,70"	7"	1/2"	**101 / 83145**	22000
3/4"-10 UNC	8,78"	7"	5/8"	**101 / 83155**	24000


Base material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.
Features: Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.
Box quantity: 8 pieces.

Washers UNI 6592-69 - **Box quantity:** 24 pieces.



øM	M16	M20	M24	M30
Smm	3	3	4	4
øAmm	30	37	44	56
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - **Box quantity:** 24 pieces.



ød	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Stainless steel codes	7277	7278	7280	7282

On request
- **Spindles with:** Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- **Anti-slip pads:** White colour.
- **Assembling of:** Nuts • washers.
- **Box quantity:** According to your request.

Thread sizes in inches are expressed as the number of threads (UNC coarse thread) per Imperial inch